

Installation Instructions – STKMLD6


INSTALLATION NOTES:

IT IS RECOMMENDED TO PRE DRILL HOLES WHEN ATTACHING THE TRIM AS TO AVOID SPLITTING ANY OF THE MOLDING. USE FINISH NAILS & GLUE. (RENTING A BRAD GUN IS A GOOD IDEA AND YOU WON'T NEED TO PRE-DRILL HOLES.)

TOTAL STACK HEIGHT: 5"

INSTALL WALL TO WALL:

1. INSTALL CLEAT 3/4" BACK FROM FACE FRAME (CUT TO SIZE.)
2. INSTALL TF396 TO TOP OF CABINET (CUT TO SIZE.)
3. APPLY CROWN MOLDING (SHKRCRM8) ON TOP OF TF396 (CUT TO SIZE.)
4. ATTACH (BOTH - SM8) TO TF396 (CUT TO SIZE.)

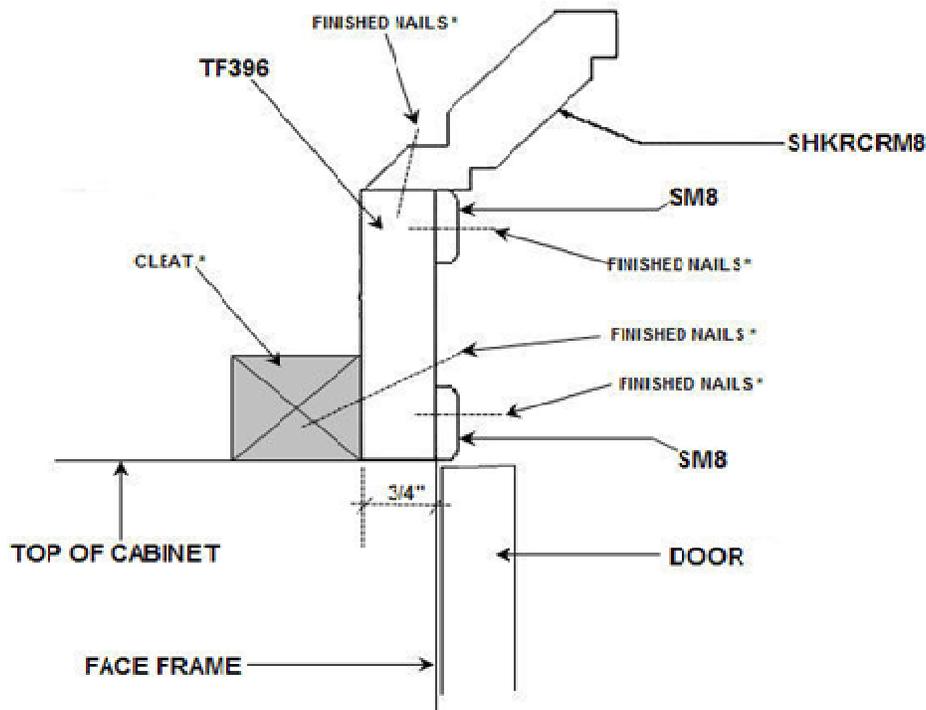

* SUPPLIED BY OTHERS.